

Digimaster 3 update EBOOT and kernel

Update kernel of digimaster 3 was newly added (one key through updating kernel by SD card), we made some modification on EBBOT program.

Update EBOOT

Click button "8" and "OK" together, then [“Press OK to confirm, and if the button “continue update Firmware” appears](#), it means your device EBOOT program is old version, you need to firstly update EBOOT program and choose a convenient way to update Digimaster 3 kernel.

Digimaster 3update kernel

After update EBOOT, it is necessary to update kernel.

Tips: Before update EBOOT, please instal D3 TOOL first.


Step 1: Click button "8" and "OK" together, then power on. The indication of "Press OK to continue and ESC to cancel" will appear on the screen. Press "OK" into Renovation.

Step 2: "Found new hardware" is found in the system when you connect USB cable with the PC.



Step 3: choose "install the software automatically", click "next".


Step 4: If DIGIMASTER 3 has been installed already, choose the second "SEC SOC SMDK Board" in dialog box, and click "Next" to complete driver installation.

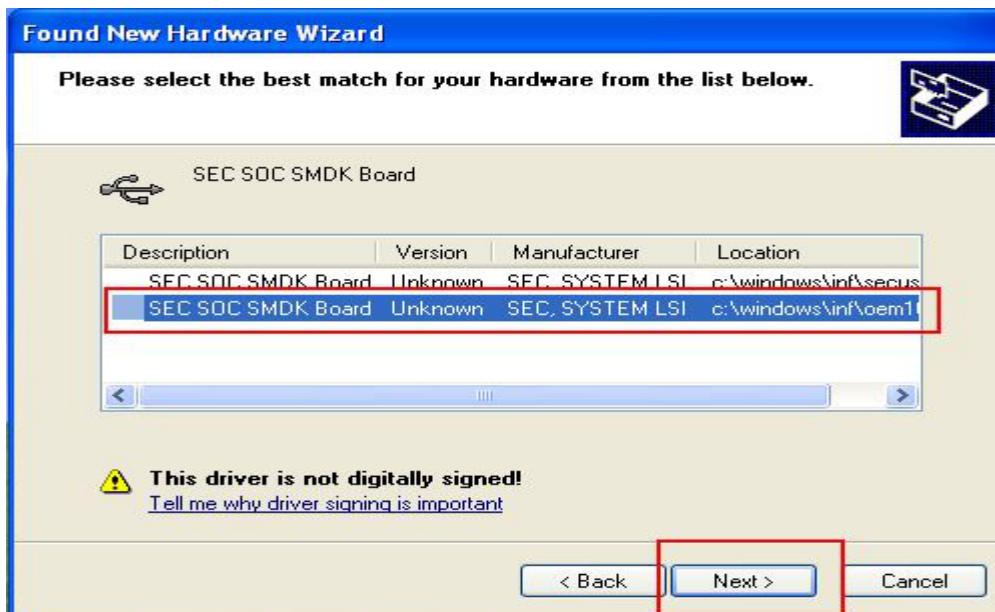

Step 5: Double-click Digimaster 3 PC Tools and choose "Kernel Update".



Step 6: Indication " [USB connect succeed](#) "will appear as below after the USB is connected.

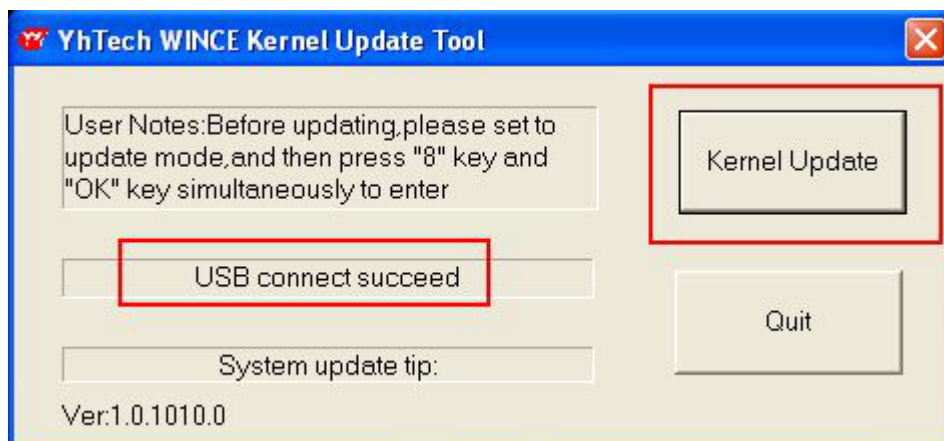

Step 7: click "[Kernel Update](#)", choose "[EBOOT_20110427.bin](#)" then click "[OK](#)" to start EBOOT program update.

Step 8: After 10sec. the DIGIMASTER 3 screen appears a twinkling red 'YH' logo which means EBOOT update is complete.

After update EBOOT successfully, please turn the power off and choose an appropriate way to update the kernel.

TIPS: Please unload the anti-virus software and firewall temporarily in order to run the software normally.